


KALAMIT

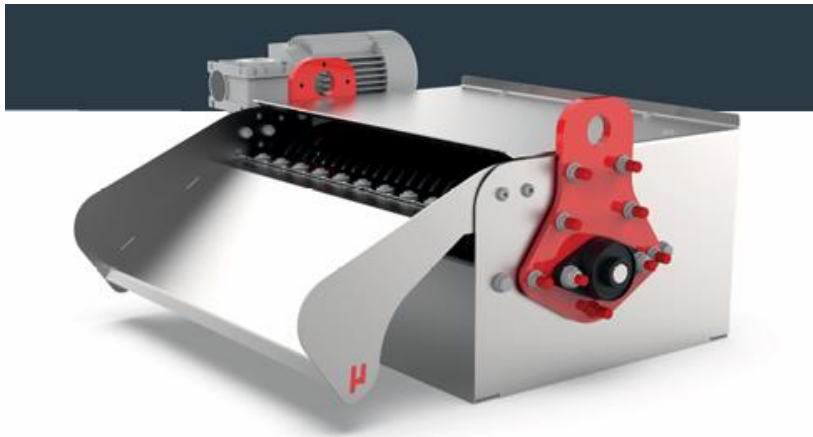

Magnetic filter made entirely of AISI304 stainless steel. Available with an Ergal or AISI304 stainless steel drive shaft.

Complete with gearmotor, sludge scraper blade, top cover, liquid inlet plate, and adjustable-angle sludge evacuation chute.

Power supply voltage: 230/400 V 50Hz, 265/460 V 60Hz three-phase.

(Other voltages available upon request, with an additional charge.)

CE certification.

Paint color: RAL 9003/3020.

Motor positioning: left.

Model:

- Kalamit 75
- Kalamit 75 can albero in INOX
- Kalamit 150 can albero in INOX
- Kalamit 250
- Kalamit 250 can albero in INOX
- Kalamit 350
- Kalamit 350 can albero in INOX
- Kalamit 500
- Kalamit 500 can albero in INOX

Kalamit

Affidabilità in azione costante

Potente, attrattivo e versatile

Resistente e di facile manutenzione

Reliability always in action

Powerful, attractive
and versatile

Exceptionally durable

μ

filtering solutions



Qui in Micronfilter siamo convinti che creare qualcosa di nuovo sia una responsabilità enorme. Per questo ogni nostro prodotto è progettato, realizzato, testato e venduto nel più assoluto rispetto delle più avanzate regole e leggi locali e internazionali, con particolare attenzione alla salute dei nostri lavoratori, alla protezione dell'ambiente, a politiche produttive sostenibili, basate sui diritti, sull'informazione e sulla trasparenza di ogni nostra azione.

Here at Micronfilter we are profoundly convinced that creating something new is a huge responsibility. This is the reason why each of our products is designed, manufactured, tested and sold in the most absolute respect of the most advanced local and international rules and laws, with particular attention to the health of our workers, to the protection of the environment, to sustainable production policies based on rights, on information and transparency of all our actions.

Micronfilter group

ITALIAN Headquarter

Via Agnelli 26,
10040 Leini (TO) - Italy
Tel. +39 (0) 11 970 2830

GERMAN Subsidiary

Am Gelicht 17,
35279 Neustadt (Hessen) - Deutschland
Tel. +49 (0) 6692 2021 914

USA Subsidiary - Coral USA Corp.

19121 Marketplace Avenue,
Bldg. 1, Suite 1-165
Kyle, Texas, 78640
Tel. +1 737 704 5785


micronfilter.it
micronfilter.eu

Ogni nostro prodotto è interamente realizzato in Italia, con passione, creatività e precisione.
Every Micronfilter product is proudly Made in Italy with all our passion, creativity and precision.



Kalamit

L'instancabile separatore magnetico
The tireless magnetic separator

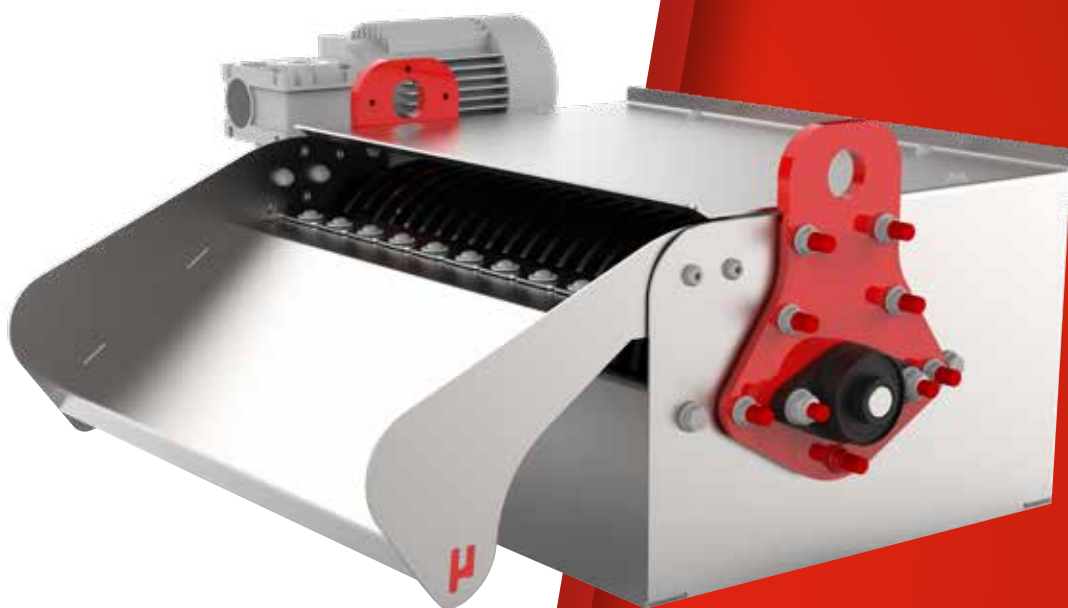

focus

*Filtrazione senza l'uso
di media filtranti a perdere*

Portata da 50 a 500 l/min.

Corpo filtrante in acciaio INOX AISI 304

features

Filtration without
disposable filter media

Flow rate from 50 to 500 l/min.

AISI 304 stainless steel filter housing

SCAN FOR MORE INFO




ON MICRONFILTER.IT

Micronfilter
FILTERING SOLUTIONS

Principi di funzionamento

Working principles

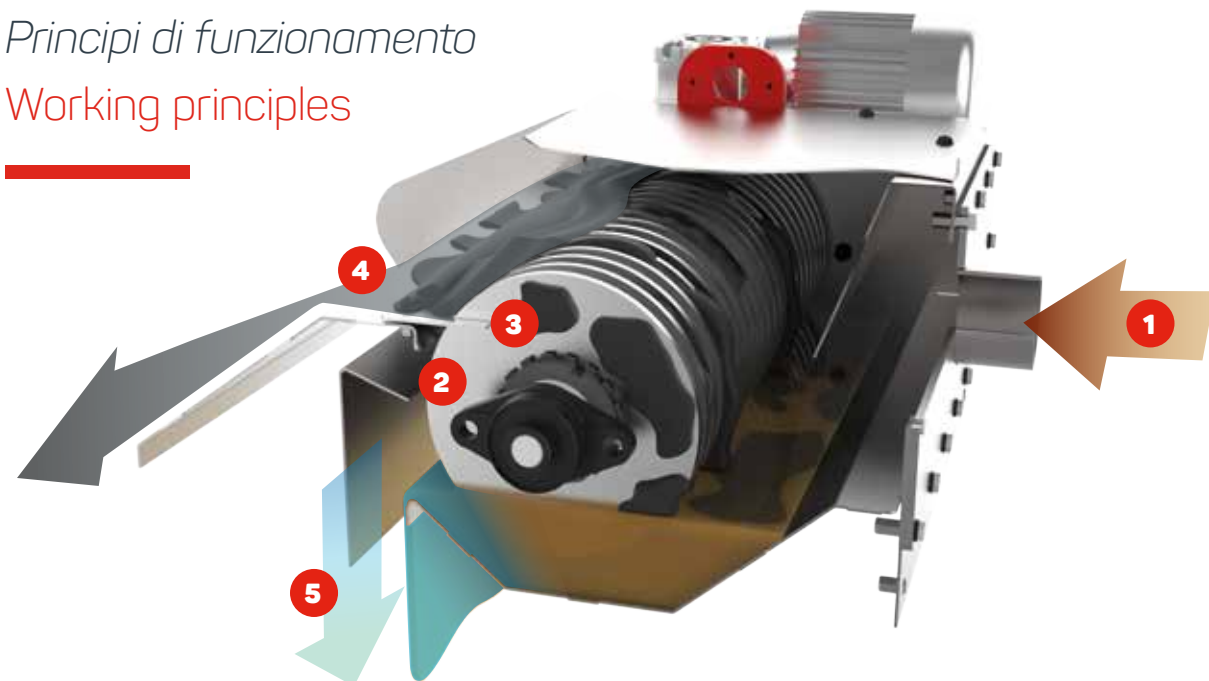


Il liquido inquinato (1) viene convogliato per gravità o pressione all'interno del separatore magnetico. Il gruppo di magneti rotanti (2) trattiene le particelle ferrose che vengono successivamente rimosse da un apposito raschiatore a pettine regolabile in acciaio INOX AISI 304 (3) che spinge i fanghi (4) verso la vaschetta di raccolta ed il liquido (5) per caduta verso la vasca di accumulo o il depuratore. Il separatore a dischi magnetici non utilizza media filtranti.

The contaminated liquid (1) is conveyed into the magnetic separator. The rotating magnets (2) retain the ferrous particles, which are then removed by a special adjustable comb scraper (3) made of AISI 304 stainless steel. The scraper pushes the sludge (4) toward the collection tray, while the liquid (5) flows by gravity onto the collection tank or filterframe. The magnetic disc separator does not require filter media.

Dimensioni principali

Main dimensions

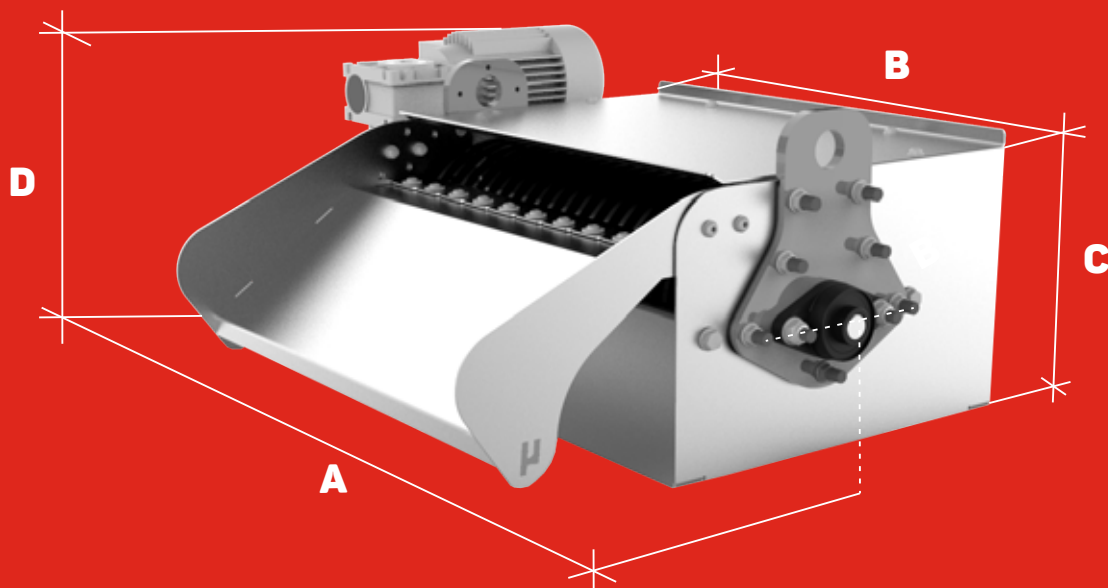

Kalamit Station

Kalamit Station

QUADRO ELETTRICO DI GESTIONE

per la gestione integrata
di tutte le funzioni

ELECTRICAL CONTROL PANEL

standard or completely customized
according to the machine's needs.

VASCA DI CONTENIMENTO

standard oppure progettata in base
alle esigenze dell'utilizzatore finale.

CONTAINMENT TANK standard
or custom-designed for the space
requirements of the end user.

SLUDGE TANK


SLUDGE TANK

ELETTROPOMPA per il reintegro
in macchina del liquido filtrato.

ELECTRO-PUMP for supply clean
coolant to the machine tool at the
required flow rate and pressure.

DIRTY LIQUID INLET

DIRTY LIQUID INLET

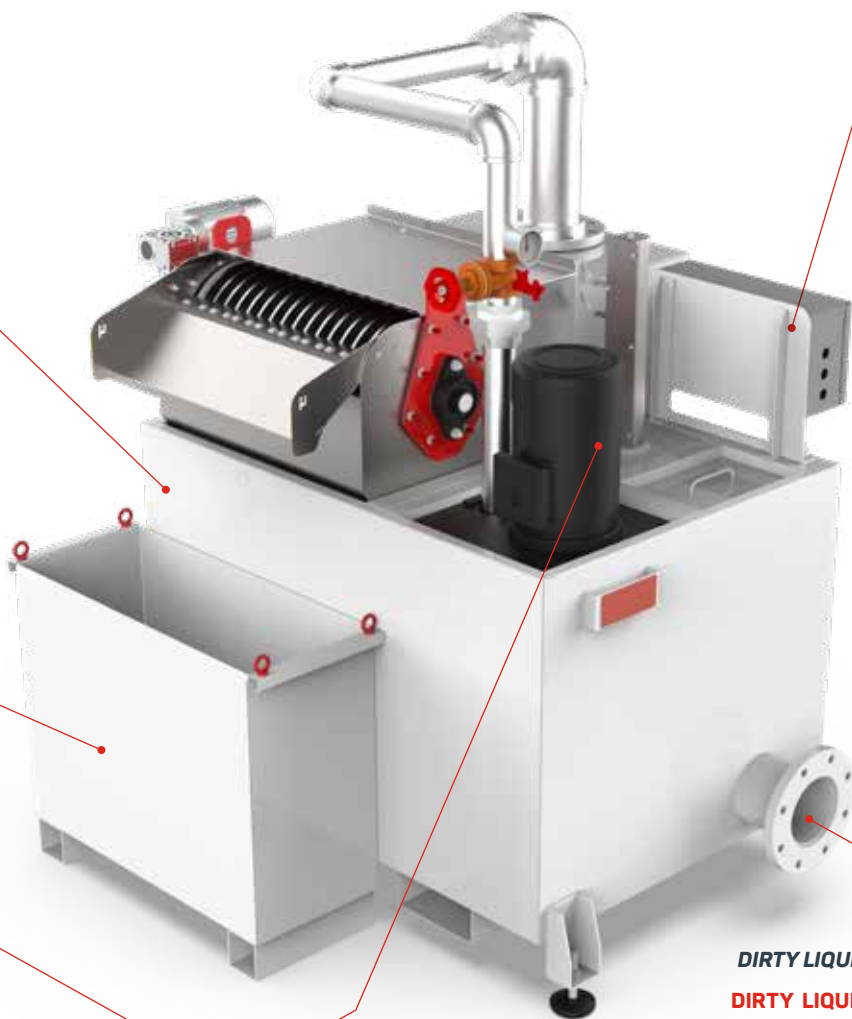

Model	Emulsion Flow Rate (l/min)	Neat Oil Flow Rate (l/min)	A (mm.)	B (mm.)	C (mm.)	D (mm.)	Gear-Motor Power (kW)	Weight (Kg)
Kalamit 75	75	37	436	180	220	287	0,12	45
Kalamit 150	150	75	556	300	220	287	0,12	65
Kalamit 250	250	125	716	460	220	287	0,12	130
Kalamit 350	350	175	916	660	220	287	0,12	115
Kalamit 500	500	250	1196	940	220	287	0,12	155

Migliori soluzioni applicative Best application solutions



Il separatore magnetico KALAMIT, realizzato in acciaio INOX AISI 304 e caratterizzato da una costruzione robusta e resistente, consente di separare con precisione le particelle magnetiche presenti nel liquido lubrorefrigerante.

Il KALAMIT, utilizzato come pre separatore, riduce sensibilmente il consumo di tessuto filtrante e migliora l'efficienza dei sistemi autopulenti.

La KALAMIT Station, realizzata progettata su misura per ogni esigenza, si configura come un impianto versatile. Questa soluzione consente di separare le particelle magnetiche dal liquido lubrorefrigerante nella vasca di contenimento, per poi reinviarla alla macchina utensile tramite elettropompa.

L'impiego dell'acciaio INOX AISI 304 non solo garantisce una durabilità eccezionale, ma aggiunge anche un tocco di qualità e affidabilità al sistema di depurazione.



The KALAMIT magnetic separator, made of AISI 304 stainless steel, enables precise separation of magnetic particles in the coolant.

Kalamit, used as a pre-separator, significantly reduces the consumption of filter fabric and improves the efficiency of self-cleaning systems.

The KALAMIT station, designed to meet the customer's specific needs, is a highly versatile system. It efficiently separates magnetic particles from the coolant in the holding tank and returns it to the machine tool using an electric pump.

The use of AISI 304 stainless steel not only guarantees exceptional durability, but also adds a premium touch of quality and reliability to the purification system.

Scegli Micronfilter KALAMIT

La serie KALAMIT per lubrorefrigeranti è indicata per tutte le macchine utensili per la lavorazione dei metalli, per la separazione di particelle magnetiche da emulsionati e olii interi (viscosità massima di 20°CSt a 40°C), per portate da 37 a 500 lt/min. Il separatore a dischi magnetici non utilizza media filtranti a perdere e consente un facile smaltimento differenziato dei fanghi recuperati.

About the Micronfilter KALAMIT

The KALAMIT series of magnetic purifiers for coolants and lubricants is suitable for all machine tools in the metalworking industry. The KALAMIT magnetic separator is designed for use with all water based emulsions or neat oils (maximum viscosity of 20° cSt at 40° C), for flow rates from 37 to 500 l/min (10 to 132 gpm). The KALAMIT magnetic disk filter does not use any disposable filter media, allowing for easy disposal of solids removed.

KALAMIT HEAVY DUTY



Magnetic purifier made entirely of STAINLESS STEEL AISI304.

Available with Ergal or AISI304 stainless steel drive shaft.

Complete with gearmotor, sludge scraper blade, top cover, liquid inlet plate, and sludge evacuation chute with adjustable inclination.

Power supply voltage: 230/400 V 50Hz, 265/460 V 60Hz three-phase.

(Other voltages available upon request, with an additional charge.)

CE certification.

Paint color: RAL 9003/3020.

Gearmotor positioning on the right

Model:

- Kalamit 600 HD
- Kalamit 600 HD can albero in INOX
- Kalamit 900 HD
- Kalamit 900 HD can albero in INOX
- Kalamit 1200 HD
- Kalamit 1200 HD can albero in INOX
- Kalamit 1500 HD
- Kalamit 1500 HD can albero in INOX
- Kalamit 1800 HD
- Kalamit 1800 HD can albero in INOX


Accessories for Kalamit and Kalamit Heavy Duty



Pre-chamber anti-flow device without inlet flange
Maximum operating pressure 0.5 bar




AISI304 stainless steel inlet plate with D63 hole, complete with gasket and fixing screws



AISI304 stainless steel inlet plate with two D63 holes, complete with gasket and fixing screws



AISI304 stainless steel inlet plate with 2" socket, complete with gasket and fixing screws



AISI304 stainless steel inlet plate with two 1" sockets, complete with gasket and fixing screws



Single gearmotor reduction ratio $i=1/600$
Double gearmotor with reduction ratio $i=1/600$